COMBINATION INSTALLATIONS

dacor The Life of the Kitchen®

DR30DI Range with ERV3015 Raised Vent

PLANNING GUIDE

⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- All appliances must be installed in accordance with the accompanying installation instructions.

Self-Rimming Installation With Raised Vent (Option 1)

- Only model DR30DI may be installed with a raised vent. Use only Dacor raised vent model ERV3015.
- A self-rimming countertop configuration is required for raised vent installation. On installations with a raised vent, when sliding the range into position, it will stop when the rear of the control panel or side panels contact the notches toward the front of the countertop.
- The self-rimming installation of the DR30DI range and ERV3015 raised vent create a “built-in” look where the range trim overlaps the countertop on both sides and the raised vent overlaps the countertop in back. It is also possible, if the cabinets are deep enough, to self rim the front of the range into the cabinet face immediately behind the control panel and door trim or behind the side panels (see side views on following page). The rear range trim will partially cover the front of the raised vent chassis in back.

Model DR30DI Range and ERV3015 Raised Vent With	A	B	C
Countertop self-rimmed only	20 5/8” (52.4 cm)	0” (0 cm) to 3 1/4” (8.3 cm)	0” (0 cm) to 5 3/8” (13.7 cm)

Countertop height for all self-rimming installations:
35 7/16” (90.0 cm) minimum, 37 7/16” (95.1 cm) maximum

Cabinet tolerances: -1/16”, (+1.6 mm) -0

MODEL DR30DI/ERV3015 COUNTERTOP SELF-RIMMED ONLY, 3 1/4 INCH SIDE PANELS NOT REMOVED

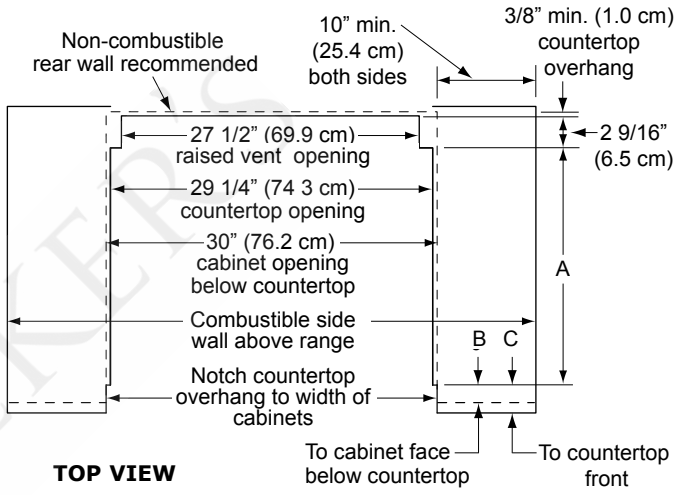
Non-combustible rear wall recommended
10” min. (25.4 cm) both sides
3/8” min. (1.0 cm) countertop overhang
2 9/16” (6.5 cm)
27 1/2” (69.9 cm) raised vent opening
29 1/4” (74 3 cm) countertop opening
30” (76.2 cm) cabinet opening below countertop
A
Combustible side wall above range
B C
Notch countertop overhang to width of cabinets
To cabinet face below countertop
To countertop front

TOP VIEW

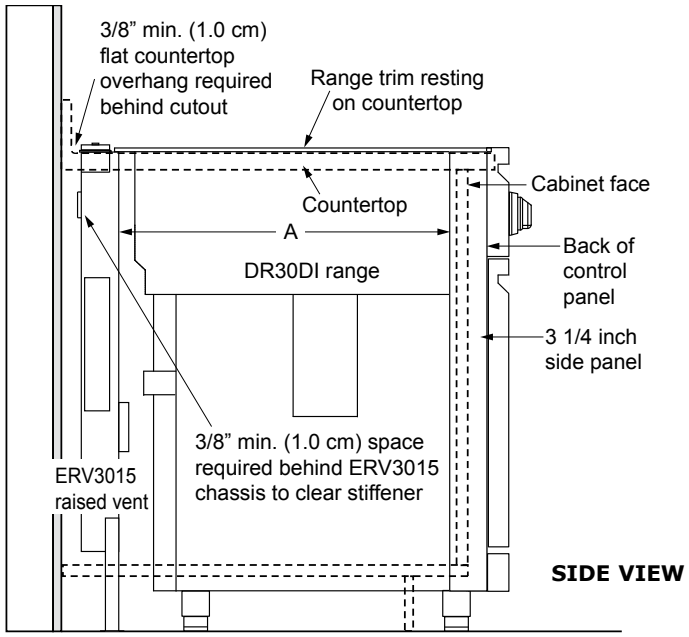
3/8” min. (1.0 cm) flat countertop overhang required behind cutout
Range trim resting on countertop
Cabinet face
Countertop
A
Back of control panel
DR30DI range
3 1/4 inch side panel
3/8” min. (1.0 cm) space required behind ERV3015 chassis to clear stiffener
ERV3015 raised vent

SIDE VIEW

GODDLERS Trusted since 1951

COMBINATION INSTALLATIONS

dacor The Life of the Kitchen®

DR30DI Range with ERV3015 Raised Vent

PLANNING GUIDE

Self-Rimming Installation With Raised Vent (Options 2 and 3)

- Only model DR30DI may be installed with a raised vent. Use only Dacor raised vent model ERV3015.
- A self-rimming countertop configuration is required for raised vent installation. On installations with a raised vent, when sliding the range into position, it will stop when the rear of the control panel or side panels contact the notches toward the front of the countertop.
- The self-rimming installation of the DR30DI range and ERV3015 raised vent create a "built-in" look where the range trim overlaps the countertop on both sides and the raised vent overlaps the countertop in back. It is also possible, if the cabinets are deep enough, to self rim the front of the range into the cabinet face immediately behind the control panel and door trim or behind the side panels (see below). The rear range trim will partially cover the front of the raised vent chassis in back.

Model DR30DI Range and ERV3015 Raised Vent With	A	B	C
Countertop and Cabinet Front Self-Rimmed,	20 5/8" * (52.4 cm)	NA	0" (0 cm) to 5 3/8" (13.7 cm)
Countertop and Cabinet Front Self-Rimmed (side panels removed)	23 7/8" * (60.6 cm)	NA	0" (0 cm) to 2 1/8" (5.4 cm)

* Cabinet face below countertop must be flush with back of notch in countertop

Countertop height for all self-rimming installations:
35 7/16" (90.0 cm) minimum, 37 7/16" (95.1 cm) maximum

Cabinet tolerances: -1/16", (+1.6 mm) -0

MODEL DR30DI/ERV3015 COUNTERTOP AND CABINET FRONT SELF-RIMMED, 3 1/4 INCH SIDE PANELS NOT REMOVED

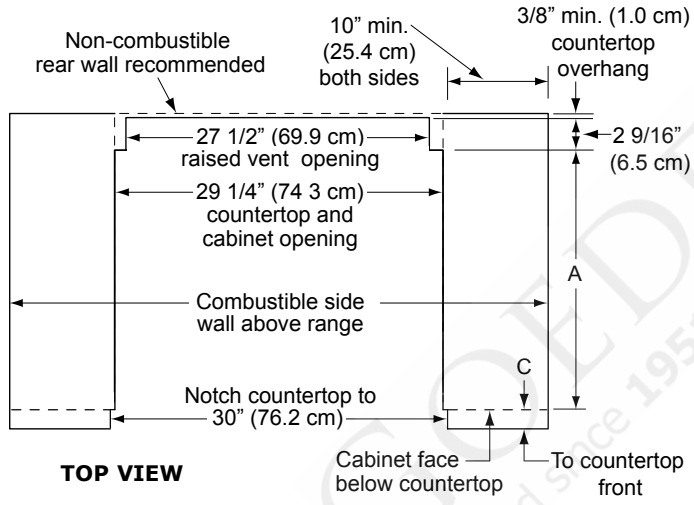
Non-combustible rear wall recommended
10" min. (25.4 cm) both sides
3/8" min. (1.0 cm) countertop overhang
27 1/2" (69.9 cm) raised vent opening
2 9/16" (6.5 cm)
29 1/4" (74 3 cm) countertop and cabinet opening
A
Combustible side wall above range
C
Notch countertop to 30" (76.2 cm)
Cabinet face below countertop
To countertop front

TOP VIEW

MODEL DR30DI/ERV3015 COUNTERTOP AND CABINET FRONT SELF-RIMMED, 3 1/4 INCH SIDE PANELS REMOVED

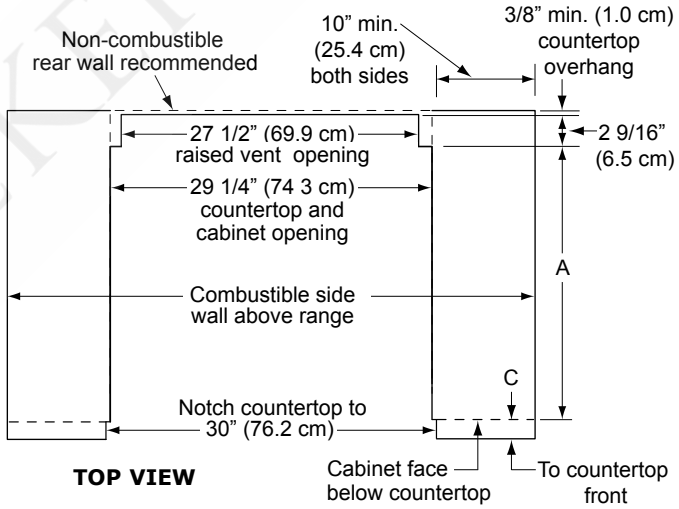
Non-combustible rear wall recommended
10" min. (25.4 cm) both sides
3/8" min. (1.0 cm) countertop overhang
27 1/2" (69.9 cm) raised vent opening
2 9/16" (6.5 cm)
29 1/4" (74 3 cm) countertop and cabinet opening
A
Combustible side wall above range
C
Notch countertop to 30" (76.2 cm)
Cabinet face below countertop
To countertop front

TOP VIEW

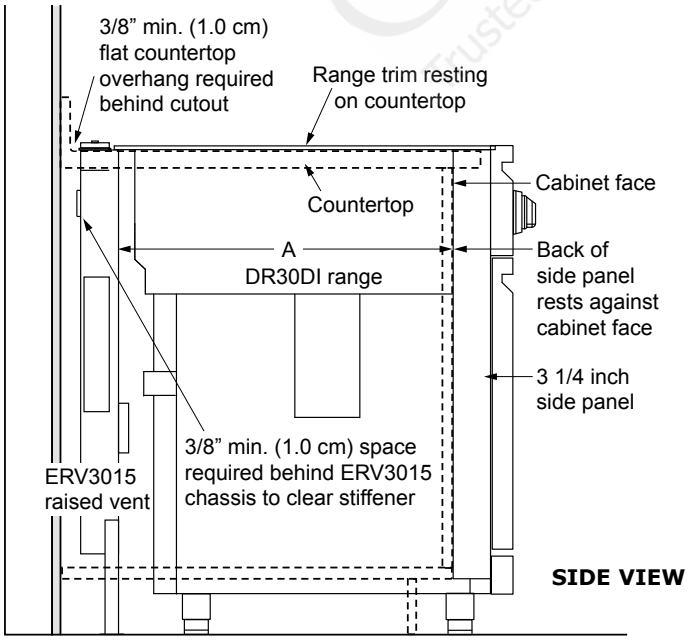
3/8" min. (1.0 cm) flat countertop overhang required behind cutout
Range trim resting on countertop
Countertop
Cabinet face
A
DR30DI range
Back of side panel rests against cabinet face
3 1/4 inch side panel
ERV3015 raised vent
3/8" min. (1.0 cm) space required behind ERV3015 chassis to clear stiffener

SIDE VIEW

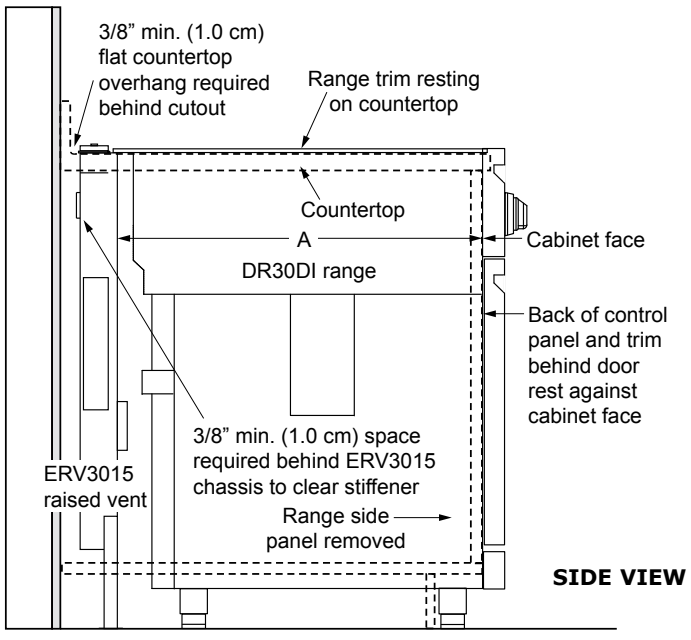
3/8" min. (1.0 cm) flat countertop overhang required behind cutout
Range trim resting on countertop
Countertop
A
DR30DI range
Cabinet face
Back of control panel and trim behind door rest against cabinet face
ERV3015 raised vent
3/8" min. (1.0 cm) space required behind ERV3015 chassis to clear stiffener
Range side panel removed

SIDE VIEW